



# Analysis High Seismic Rise in Building by RS System

Hrishikesh Tripathi

Shri Sant Gadge Baba College of Engineering & Technology, Bhusawal

**Abstract:** Reinforced Concrete Frames are the most commonly adopted buildings construction practices in India. With growing economy, urbanization and unavailability of horizontal space increasing cost of land and need for agricultural land, high-rise sprawling structures have become highly preferable in Indian buildings scenario, especially in urban. With high-rise structures, not only the building has to take up gravity loads, but as well as lateral forces. Many important Indian cities fall under high risk seismic zones, hence strengthening of buildings for lateral forces is a prerequisite. In this study the aim is to analyze the response of a high-rise structure to ground motion using Response Spectrum Analysis.

**Keywords:** Reinforced Concrete Frames

## I. INTRODUCTION

Earthquake has always been a threat to human civilization from the day of its existence, devastating human lives, property and man-made structures. The very recent earthquake that we faced in our neighbouring country Nepal has again shown nature's fury, causing such a massive destruction to the country and its people. It is such an unpredictable calamity that it is very necessary for survival to ensure the strength of the structures against seismic forces. Therefore there is continuous research work going on around the globe, revolving around development of new and better techniques that can be incorporated in structures for better seismic performance. Obviously, buildings designed with special techniques to resist damages during seismic activity have much higher cost of construction than normal buildings, but for safety against failures under seismic forces it is a prerequisite.

Reinforced Concrete frames are the most common construction practices in India, with increasing numbers of high-rise structures adding up to the landscape. There are many important Indian cities that fall in highly active seismic zones. Such high-rise structures, constructed especially in highly prone seismic zones, should be analyzed and designed for ductility and should be designed with extra lateral stiffening system to improve their seismic performance and reduce damages. Two of the most commonly used lateral stiffening systems that can be used in buildings to keep the deflections under limits are bracing system and shear walls. The use of steel bracing system is a viable option for retrofitting a reinforced concrete frame for improved seismic performances. Steel braces provide required strength and stiffness, takes up less space, easy to handle during construction, can also be used as architectural element and is economic. Steel braces are effective as they take up axial stresses and due to their stiffness, reduced deflection along the direction of their orientation.



Fig.1 RC building with exterior bracing system lateral stiffener [1]

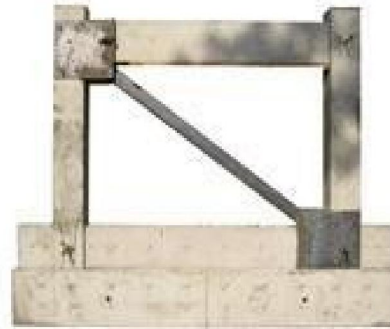


Fig.2 Connection of steel brace to as concrete member [2]

Shear wall is a vertical member that can resist lateral forces directed along its orientation. Shear walls are structural system consisting of braced panels, also known as Shear Panels. Concrete Shear walls are widespread in many earthquake-prone countries like Canada,

Turkey, Romania, Colombia, Russia. It has been in practice since 1960's, used in buildings ranging from medium- to high-rise structures. Shear walls should always be placed symmetrically in the structure and on each floor, including the basement. Reinforced concrete Shear walls transfer seismic forces to foundation and provide strength and stiffness

RC shear walls carry earthquake loads down to the foundation. They provide large strength and stiffness to buildings in the direction of their orientation.

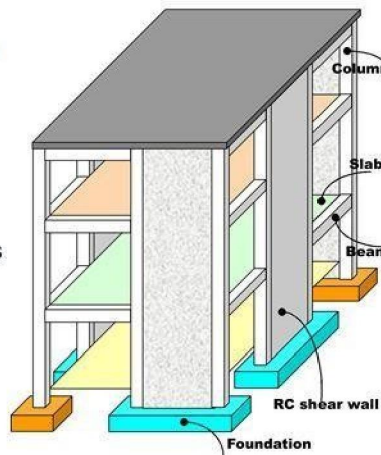


Figure 3: Building showing a Shear Wall [3]

### 1.1 Objective:

The objectives of present work are as follows:

1. To analyze the building with different ground motions, namely, IS code compatible ground motion, Imperial Valley ground motion and San Francisco ground motion.



2. To perform dynamic analysis of the building using response spectrum method.
3. To model building with different lateral stiffness systems and study the change in response of the building
4. To compare and get a better and efficient lateral stiffness system

### 1.2 Scope of Project

1. This study concerns analysis of reinforced concrete moment resisting open frame, open frame with braces and open frame with shear walls only, using Staad Pro program. The effect of brick infill is ignored.
2. This study involves a theoretical 12 storey building with normal floor loading and no in fill walls.
3. The comparison of fundamental period, base shear, inter-storey drift and top-storey deflection is done by using Response Spectrum analysis, which is a linear elastic analysis

## II. LITERATURE REVIEW

**Chandurkar, Pajgade (2013)** evaluated the response of a 10 storey building with seismic shear wall using ETAB v 9.5. Main focus was to compare the change in response by changing the location of shear wall in the multi-storey building. Four models were studied- one being a bare frame structural system and rest three were of dual type structural system. The results were excellent for shear wall in short span at corners. Larger dimension of shear wall was found to be ineffective in 10 or below 10 stories. Shear wall is an effective and economical option for high-rise structures. It was observed that changing positions of shear wall was found to attract forces, hence proper positioning of shear wall is vital. Major amount of horizontal forces were taken by shear wall when the dimension is large. It was also observed that shear walls at substantial locations reduced displacements due to earthquake.

**Chavan, Jadhav (2014)** studied seismic analysis of reinforced concrete with different bracing arrangements by equivalent static method using Staad Pro. software. The arrangements considered were diagonal, V-type, inverted V-type and X-type. It was observed that lateral displacement reduced by 50% to 60% and maximum displacement reduced by using X-type bracing. Base shear of the building was also found to increase from the bare frame, by use of X-type bracing, indicating increase in stiffness.

**Esmaili et al. (2008)** studied the structural aspect of a 56 stories high tower, located in a high seismic zone in Tehran. Seismic evaluation of the building was done by non-linear dynamic analysis. The existing building had main walls and its side walls as shear walls, connected to the main wall by coupling of beams. The conclusion was to consider the time-dependency of concrete. Steel bracing system should be provided for energy absorption for ductility, but axial load can have adverse effect on their performance. It is both conceptually and economically unacceptable to use shear wall as both gravity and bracing system. Confinement of concrete in shear walls is good option for providing ductility and stability.



**Akbari et al. (2015)** assessed seismic vulnerability of steel X-braced and chevron-braced Reinforced Concrete by developing analytical fragility curve. Investigation of various parameters like height of the frame, the p-delta effect and the fraction of base shear for the bracing system was done. For a specific designed base shear, steel-braced RC dual systems have low damage probability and larger capacity than unbraced system. Combination of stronger bracing and weaker frame reduces the damage probability on the entire system. Irrespective of height of the frame, Chevron braces are more effective than X-type bracing. In case of X-type bracing system, it is better to distribute base shear evenly between the braces and the RC frame, whereas in case of Chevron braced system it is appropriate to allocate higher value of share of base shear to the braces. Including p-delta effect increases damage probability by 20% for shorter dual system and by 100% for taller dual systems. The p-delta effect is more dominant for smaller PGA values.

### III. METHODOLOGY

#### 3.1 Literature Review

To gather various types of work on seismic analysis of high-rise structures and increasing lateral stiffness of the system various papers, thesis and research articles were studied thoroughly and referred. The idea behind doing literature review was to collect data and have understanding on different methods and approaches that can be used, to clearly understand the software requirements of the project. Literature review was done to have thorough guidelines during the entire project work.

As discussed in the scope of the work, the entire work is divided into three parts: Analysis of bare frame in all the above three mentioned ground motions Analysis of the braced frames. For Analysis of the frame with shear wall. For analysis a 12 stories high building is modeled in Staad Pro as a space frame. The building does not represent any real existing building. The building is unsymmetrical with the span more along Z direction than along X direction. The building rises up to 42m along Y direction and spans 15m along X direction and 20 m. along Z direction. The building is analyzed by Response Spectrum Analysis, which is a linear dynamic analysis. Dynamic Analysis is adopted since it gives better results than static analysis. The specifications of the frame are given in Table 1 and the plan and the model of the building is shown in

| Specifications                | Data |
|-------------------------------|------|
| Storey Height                 | 3.5m |
| No. of bays along X direction | 3    |
| No. of bays along Y direction | 4    |
| Bay Length along X direction  | 5m   |
| Bay Length along Z direction  | 5m   |
| Concrete grade used           | M 30 |



|                         |                       |
|-------------------------|-----------------------|
| Columns                 | 0.45m X 0.25m         |
| Longitudinal Beams      | 0.40m X 0.25m         |
| Transverse Beams        | 0.35m X 0.25m         |
| Slab Thickness          | 0.1m                  |
| Unit Weight of Concrete | 25 kN/m <sup>3</sup>  |
| Live Load               | 3.5 kN/m <sup>2</sup> |
| Zone                    | IV                    |
| Soil Conditions         | Hard Soil             |
| Damping Ratio           | 5%                    |

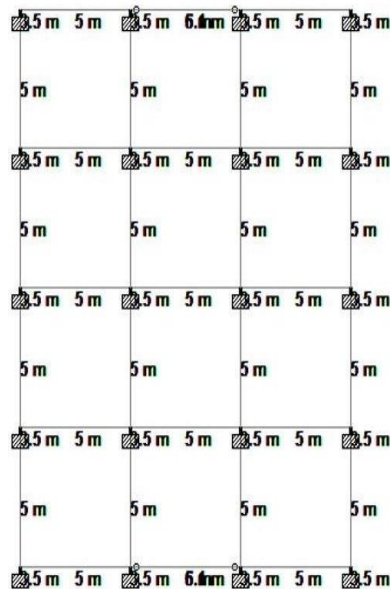


Fig. 4 Plan of the building

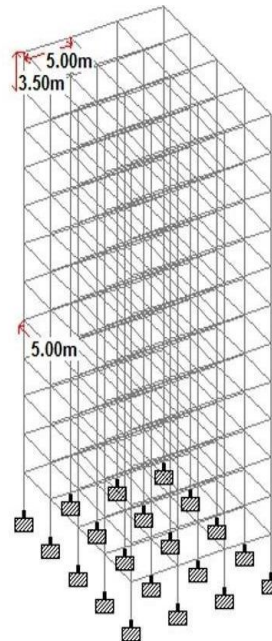


Fig. 5 Model of the building

### 3.2 Response Spectrum Analysis

Response Spectrum is a linear dynamic analysis. Response spectrum is a plot of the maximum response of a SDOF system to a ground motion versus time period. It is derived from time history analysis of ground motion by taking the maximum response for each time period. The time periods of the bare frame up to 12th mode calculated from MATLAB program is So, by IS code time period of the bare frame =

1.237 s In Staad Pro, Response Spectrum Analysis is done as follows:

1. After preparing the bare model, seismic definition for IS 1893-2002 was created by giving the required input of time period, zone factor, R factor, etc. Then under seismic definition self-weight and floor weights of 2.5kN/m<sup>2</sup> and 3.5 kN/m<sup>2</sup> were given.
2. Under Load Definition Earthquake load, Dead load, Live load and various load combinations were created.



**REFERENCES**

- [1]. Google images for Steel Bracing in RC building.
- [2]. Google images for Shear Wall. IS 1893 (Part 1) : 2002 Indian Standard Criteria for Earthquake Resistant Design of Structures, Part 1 General Provisions and Buildings, (Fifth Revision). Anil K.
- [3]. Chopra [2003] “Dynamics of Structures, Theory and Applications to Earthquake Engineering” (Prentice Hall of India Private Limited). Chandurkar P. P, Dr. Pajgade P. S. (2013).
- [4]. “Seismic Analysis of RCC Building with and Without Shear Wall.”, International Journal of Modern Engineering Research (IJMER) (2249-6645).
- [5]. Chavan Krishnaraj R. ,Jadhav H.S. (2014). “Seismic Response of RC Building with Different Arrangement of Steel Bracing System.”, International Journal of engineering Research and Applications (2248-9622).
- [6]. Esmaili O. et al. (2008). “Study of Structural RC Shear Wall System in a 56- Storey RC Tall Building.”, The 14th World Conference on Earthquake Engineering October 12-17, 2008 , Beijing, China. Akbari R.etal. (2014).
- [7]. “Seismic Fragility Assessment of Steel X-Braced and Chevron- Braced RC Frames.” ,Asian Journal of Civil Engineering (BHRC), VOL16 No.1 . Kappos Andreas J., Manafpour Alireza (2000). “Seismic Design of R/C Buildings with the aid of advanced analytical techniques.” Engineering Structures 23 (2001) 319-332.
- [8]. Yamada M. et al. “ Multistorey Bracing Systems of Reinforced Concrete and Steel Rigid Frames Subjected To Horizontal Loads- Proposition of Total Evaluation on the Aseismic Capacity for Design.”
- [9]. Viswanath K.G. et al.(2010). “Seismic Analysis of Steel Braced Reinforced Concrete Frames.” International Journal of Civil & Structural Engineering (0976-4399).